



VLS系列梭阀

型号说明

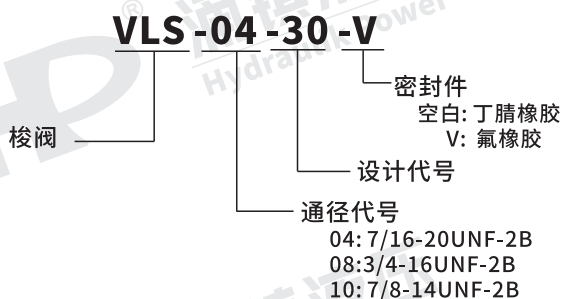

● 液压符号





● 规格表

型号	额定压力 (bar)	最大流量 (l/min)	重量 (kg)
VLS-04-30	250	6.0	0.20
VLS-08-30		19.0	0.50
VLS-10-30		30.0	0.80
使用油液	ISO VG 32,46,68	操作温度	-40~120°C
粘度范围	10~400 cSt	污染标准	≤NAS12级,25μm


插装阀

SH系列板式梭阀

型号说明

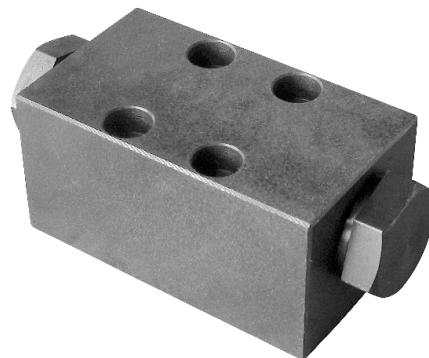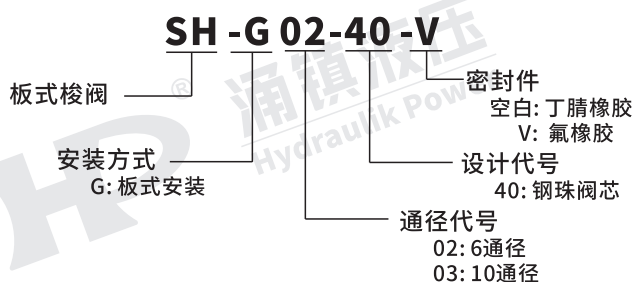

● 液压符号



● 规格表

型号	最高压力 (bar)	最大流量 (l/min)	操作温度
SH-G02	250	20	-15~70°C
SH-G03	320	60	
使用油液	ISO VG 32,46,68	污染标准	≤NAS12级,25μm
粘度范围	10~400 cSt		